


CATHEDRAL RENEWAL CAMPAIGN



APRIL 2018

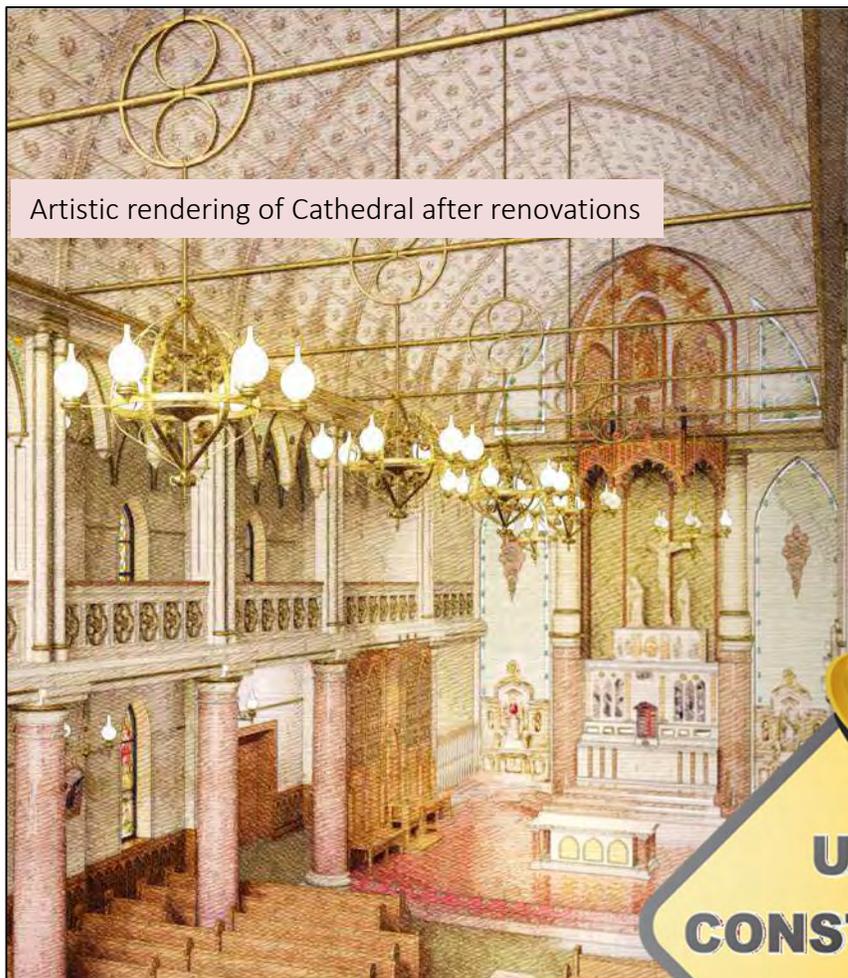

Artistic rendering of Cathedral after renovations

Phase 2 – Sanctuary Renovations and Utilities

Projected Cost: \$2,400,000

Timeline: January – July 2018

Project Team:

- Trinity Project Management
- Mason Architects
- Constructors Hawaii

Campaign Office:

(808) 585-3329 | (808) 585-3357

CRC@rcchawaii.org

HonoluluCathedralRenewal.org

Cathedral Renewal Campaign

1184 Bishop Street

Honolulu, HI 96813



Renovations taking place January – July 2018:

- New extended sanctuary platform, pictured right in early stages of construction
- New Bishops' Crypts and Burial Chapels on either side of the Sanctuary
- New stairs and ADA ramp to access Sanctuary
- Remove scrim (screen), move Bishop's Chair to mauka side and install new wood-carved Cathedra and Altar Servers' screens on either side of Sanctuary platform
- Remove and restore four pictorial stained glass windows, originally installed in the 1920's
- New electrical lines
- Install pipes and infrastructure for new climate control system
- Hazardous material abatement (safe removal of asbestos and lead materials)





Left, sanctuary wall and column with plaster removed to expose coral construction. High Altar is covered in protective plastic.

Right, base of coral column.

New plaster will be applied to restore the walls and columns.




R E N O V A T E



Deteriorated frame from one of the four stained glass windows being restored as part of this phase.

By the project's end, all fourteen pictorial windows (circa 1920) and twenty-three geometric windows (circa 1870) will be restored.

r
e
s
t
o
r
e

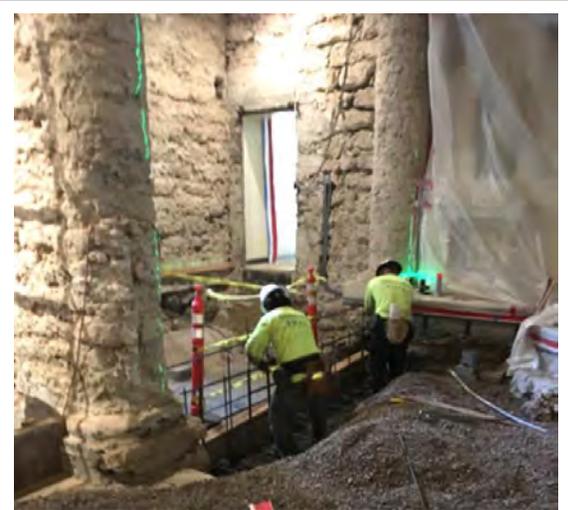

Above, workers use rebar to structurally reinforce the crypts of Bishops Maigret and Scanlan.

Below, Maigret's crypt is on the left and Scanlan's is on the right.

P R E S E R V E



Coral blocks excavated from the sanctuary, near the base of the high altar and the Bishops' crypts.

Most of the coral was put back in place after the crypts were reinforced.

